



Kit Contents			
Pos	Description	Part No	Pcs
1	Spacer plate	25654-01	4
2	ABS cord bracket RHS	25654-02	1
3	ABS cord bracket LHS	25654-03	1

**👁 Note!**

Please note that there can be small differences between your product and the images in these instructions.

**👁 Note!**

Please note that during storage and transport, especially at high ambient temperature, some of the oil and grease used for assembly may leak and stain the packaging. This will not cause damage to the product, wipe off the excessive oil or grease with a cloth.

**👁 Note!**

Before you install this product, check the kit contents. If anything is missing, please contact an Öhlins dealer.

**⚠ Warning!**

Before you install this product, read the Öhlins Owner's manual. This product is an important part of the vehicle and the vehicle stability.

## Adapter Kit for Mitsubishi Lancer Evolution IV-VI (CP9A)

# MIZ MIOO FRONT

## Mounting Instructions

# MOUNTING INSTRUCTIONS

**⚠ Warning!**

*We strongly recommend to let an Öhlins dealer install this product.*

**⚠ Warning!**

*If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.*

**👁 Note!**

*When you work with this product, see the vehicle service manual for vehicle specific procedures and important data.*

**👁 Note!**

*Before you install this product clean the vehicle.*

**1**



Follow the MIS MI01 Mounting Instruction.

**2**

Install the two spacer plates on each side of the upright according to Fig1. Tighten the OE bolts to the torque specified for the vehicle.

**3**

Install the new ABS cord bracket on the upright bracket according to Fig 2 and tighten the supplied nut to 6Nm.

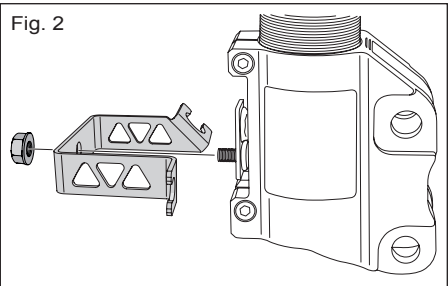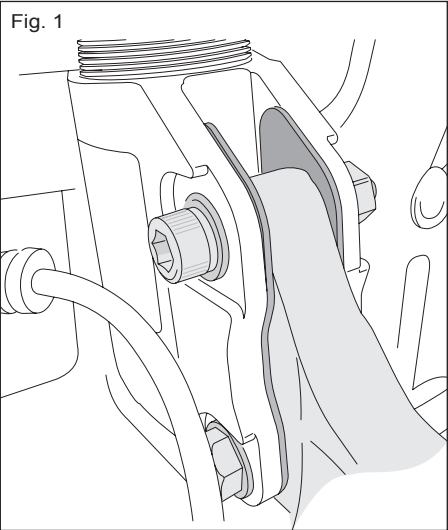

# MOUNTING INSTRUCTIONS

# ADJUSTMENTS

## ⚠ Warning!

Before you ride/drive, always make sure that the setup is according to the recommended setup data. Read about adjustments and setting up in the Öhlins Owner's Manual before you make any adjustments. Contact an Öhlins dealer if you have any questions about setting up.

The standard preload is 2 mm from a free length of 200 mm, giving 198 mm installed length, see fig 3.

# SETUP DATA

## Recommended set-up

Rebound setting		
Track	2-7	clicks
Winding road	5-10	clicks
Street	10-20	clicks
Spring preload	2	mm

## Recommended spring

48010-31 (100 N/mm)

## Vehicle height adjustment range

With both the spring preload and height adjustments in their recommended positions, the vehicle is lowered approximately 35 mm when compared to the original suspension.


The spring preload adjustment range is 2-10 mm. Giving approximately 25-35 mm lower ride height of the car.

Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

© Öhlins Racing AB. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Öhlins Racing AB  
Box 722  
S-194 27 Upplands Väsby, Sweden  
Phone +46 8 590 025 00  
fax +46 8 590 025 80

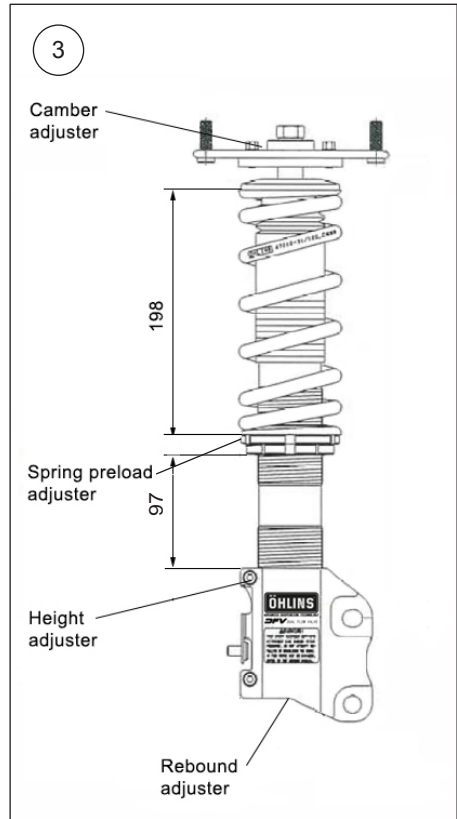

## ⚠ Warning!

The adjustment range is the recommended position  $\pm 10$  mm. If the bracket is moved outside the adjustment range, it may come loose or the wheel might hit the wheel house. As the height adjuster is turned one rotation, the position moves 2.0 mm.

Part no. MI\_MIZMI00\_0  
Issued 2018-11-12



[www.ohlins.com](http://www.ohlins.com)



**👁 Note!**

*Please note that there can be small differences between your product and the images in these instructions.*

**👁 Note!**

*Please note that during storage and transport, especially at high ambient temperature, some of the oil and grease used for assembly may leak and stain the packaging. This will not cause damage to the product, wipe off the excessive oil or grease with a cloth.*

**👁 Note!**

*Before you install this product, check the kit contents. If anything is missing, please contact an Öhlins dealer.*

**⚠ Warning!**

*Before you install this product, read the Öhlins Owner's manual. This product is an important part of the vehicle and the vehicle stability.*

## Adapter Kit for Mitsubishi Lancer Evolution IV-VI (CP9A)

# **MIZ M100 REAR**

## Mounting Instructions

# MOUNTING INSTRUCTIONS

---

## **⚠ Warning!**

*We strongly recommend to let an Öhlins dealer install this product.*

---

---

## **⚠ Warning!**

*If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.*

---

---

## **👁 Note!**

*When you work with this product, see the vehicle service manual for vehicle specific procedures and important data.*

---

---

## **👁 Note!**

*Before you install this product clean the vehicle.*

---

**1.**

Install the rear shock absorbers according to mounting instructions for MIS MI01.



# ADJUSTMENTS

## **⚠ Warning!**

*Before you ride/drive, always make sure that the setup is according to the recommended setup data. Read about adjustments and setting up in the Öhlins Owner's Manual before you make any adjustments. Contact an Öhlins dealer if you have any questions about setting up.*

The standard preload is 2 mm from a free length of 200 mm, giving 198 mm installed length, see fig 2.

## SETUP DATA

### Recommended set-up


Rebound setting		
Track	2-7	clicks
Winding road	5-10	clicks
Street	10-20	clicks
Spring preload	2	mm

### Recommended spring

48010-23 (80N/mm)

### Vehicle height adjustment range

With both the spring preload and height adjustments in their recommended positions, the vehicle is lowered approximately 30 mm when compared to the original suspension. The spring preload adjustment range is 2-10 mm. Giving approximately 25-35 mm lower ride height of the car.

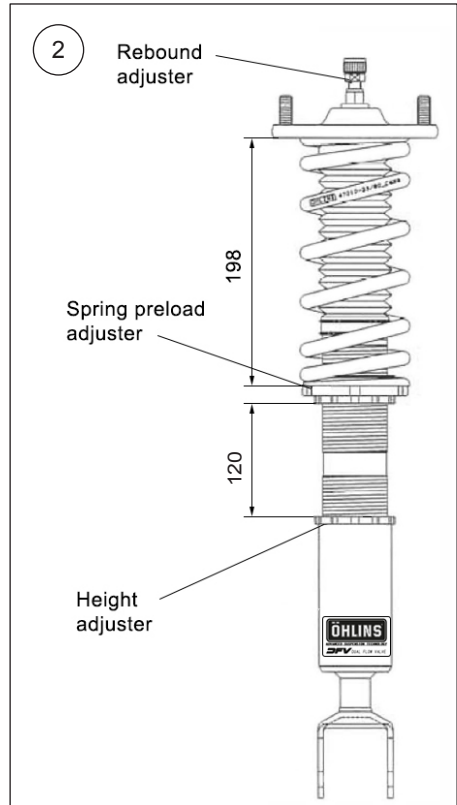

## **⚠ Warning!**

*The adjustment range for the height adjuster is the recommended position  $\pm 15$  mm. If the height adjustment is moved outside the adjustment range, it may come loose or the wheel may hit the wheel house*

Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI\_MIZMI00\_0  
Issued 2018-11-12

© Öhlins Racing AB. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Racing AB  
Box 722  
S-194 27 Upplands Väsby, Sweden  
Phone +46 8 590 025 00  
fax +46 8 590 025 80



[www.ohlins.com](http://www.ohlins.com)